

FLOODLIGHT SERIES

Square Floodlight Luminaire

Type:

Fixture:



TECHNICAL DATA

PRODUCT	WTG-FL80W	WTG-FL120W
WATTAGE	80W	120W
LUMENS	6400 LM	9600 LM
EFFICACY	80 LM/W	
CCT	5000K	
VOLTAGE	100 - 277V	
CRI	>74	
THD	<20%	
IP RATING	IP65	
POWER FACTOR	>0.95	
WORKING TEMP.	-4°F ~ 104°F	



Aluminum sink attached to the housing directly to reduce LED heats and add to life

DESCRIPTION

The Flood Light is a great way to illuminate and give character to areas with signage needing constant attention. Commercial, industrial, and residential landscaping owners appreciate the maintenance-free and low-heat operation of LED floodlighting for their properties.

INTENDED USE

WTG-FL120W series is ideal for illuminating yard, dock, backyard, barns, farms, alleyways, roadway, parking lots, sidewalk, porch, building wall, etc.



ORDERING INFORMATION

STANDARD ITEM: **WTG-FL-120W-277-50K**

OR CUSTOMIZE BELOW:

- - -

Series	Wattage	Voltage	CCT
WTG-FL - (Flood-light)	80W 120W	277 - (100 - 277V)	50K - (5000K)

FLOODLIGHT SERIES

Square Floodlight Luminaire

Type:

Fixture:

CONSTRUCTION

Heavy-duty cast aluminum housing; rust and corrosion proof; polyester powder coating. Aluminum sink attached to the housing directly to reduce LED heats and add to life.

FINISH

Bronze finish. Environmentally friendly polyester powder coatings.

OPTICS

High light transmittance and polycarbonate with UV.


ELECTRICAL

Class 1, constant current.


LISTINGS

ETL certified. Luminaire is IP65 rated.

DIMENSIONS

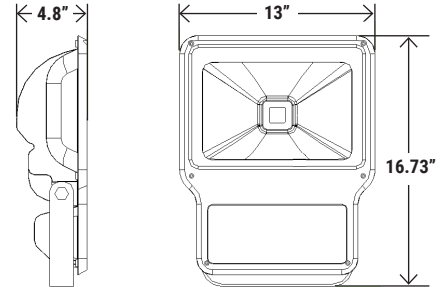

PHOTOMETRICS

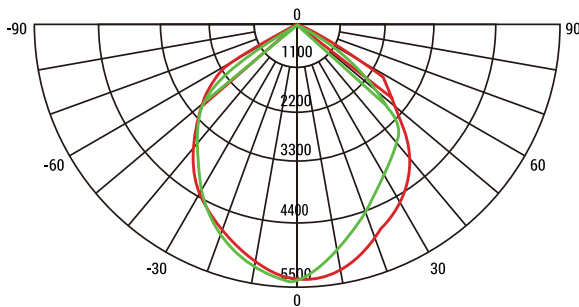

Average Beam Angle (50%) : 103.8 DEG

UNIT:cd

— C0/180, 104.7deg

— C90/270, 101.1deg