

## Edge-lit Round Pendant

Type:

Fixture:



### TECHNICAL DATA

PRODUCT	ELR		
	12"	16"	24"
SIZE	12"	16"	24"
WATTAGE	15W	25W	40W
LUMENS	1200LM	2000LM	3200LM
VOLTAGE	120-277V		
EFFICACY	80 LM/W		
CC	3000K/4000K/5000K Color Changeable		
DIMMING	TRIAC @ 120V ONLY		
POWER FACTOR	>0.9		
CRI	>90		
ANGLE BEAM	120°		
POWER CORD	5FT		

### DESCRIPTION

The Edge-lit Round Pendant is a sleek, ultra-low profile & unobtrusive LED surface mount and suspension mount downlights with field CCT selectable function, available in size 12", 16" & 24".

### INTENDED USE

The Edge-lit Round Pendant is ideal for use in corridors, living spaces, closets, hallways, pantries, and stairways.



### ORDERING INFORMATION

STANDARD ITEM: **ELR-12-12L-U-CC-P**

OR CUSTOMIZE BELOW:

Series	Size / Lumen Package	Voltage	CC	Mounting
ELR - (Edge-lit Round)	12-12L - (12" / 1200 lm, 15W)	U - 120-277V	CC - Color Changeable (3000K, 4000K, 5000K)	P - Pendant
	16-20L - (16" / 2000 lm, 25W)			
	24-32L - (24" / 3200 lm, 40W)			

## Edge-lit Round Pendant

Type:

Fixture:

### ELECTRICAL

Class 2, constant current, 120-277V, 50-60 HZ, 0.95Amp@100V. Triac dimming circuit.

### LISTINGS



ETL certified. Energy star. IES available. Damp location.

### CC SWITCH



**5000K** Cool White  
**4000K** Neutral White  
**3000K** Warm White

### MOUNTING

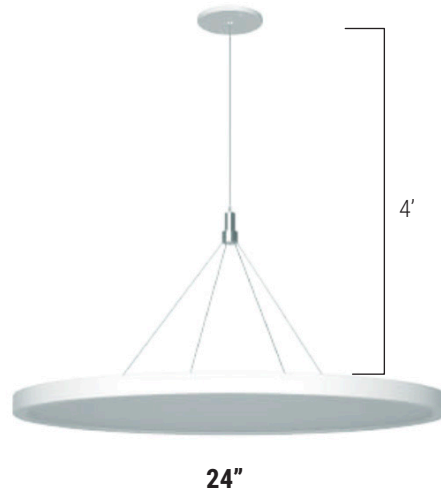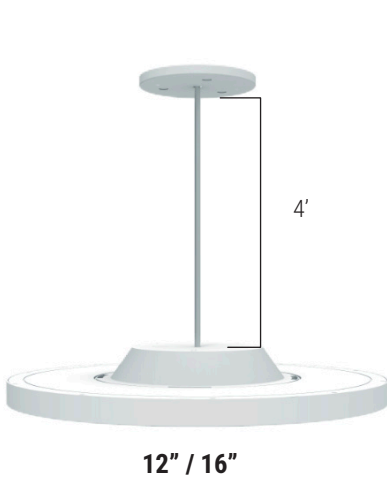

"12 & 16" versions use a rigid downrod for pendant mounting, using the included round canopy. This pendant kit comes with 4 sections of threaded 1ft long stems, all finished in the same color as the housing.

"24" versions uses a stainless steel suspension cable kit that includes a round canopy, with an adjustable maximum hanging length of 4ft.

### DIMENSIONS

